




More Precision

colorSENSOR // True Color Measuring Systems



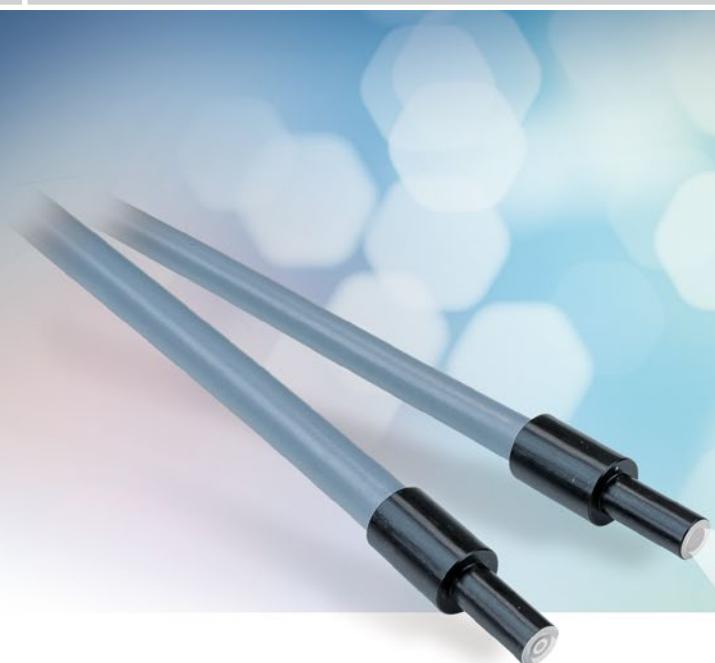

-  For textiles, paper, metallic paint, sand, granulate, wood veneers or masterbatch
-  For structured and metallic-effect surfaces
-  Homogeneous illumination of the measuring point
-  Max. working distance of 100 mm (on strongly reflecting surfaces)
-  Very precise positioning of the detection point



With the circular sensor, the light emitted by the controller is sent as an illuminated ring at an angle of 11° or 34° (depending on type) to the surface of the object to be tested. The diffuse back reflection (surface color) of the sample is detected by the sensor at 0° (parallel) to the surface and transmitted to the controller via an optical fiber. The ring illumination makes it possible to detect the diffuse color reflex regardless of structure or reflection. The sensors are available with different illumination angles and different spot sizes. Therefore, it is possible to measure colors with a repeatability of $\Delta E \leq 0.3$ in relative terms up to a working distance of 100 mm. Other sheaths and cable lengths are optionally available.

The circular sensor opens up new fields of application for the colorSENSOR CFO product series. Combined with the high performance of the CFO series, the ring illumination provides even more precision due to uniform illumination. This compact combination can be universally used but is also suitable for special solutions (customer-specific adaptions). The homogeneous illumination mainly offers advantages on strongly structured or shiny-metallic surfaces while providing highest precision when distinguishing colors such as white shades. The circular sensor offers many advantages in terms of performance and installation possibilities. Due to the external controller, less installation space is required at the measuring point.


Due to the standard FA connection, the optical fiber is also compatible with other controllers (previous series such as LT or WLCS).

Measurement geometry

Circular sensor R34°c:0°, R11°c:0°

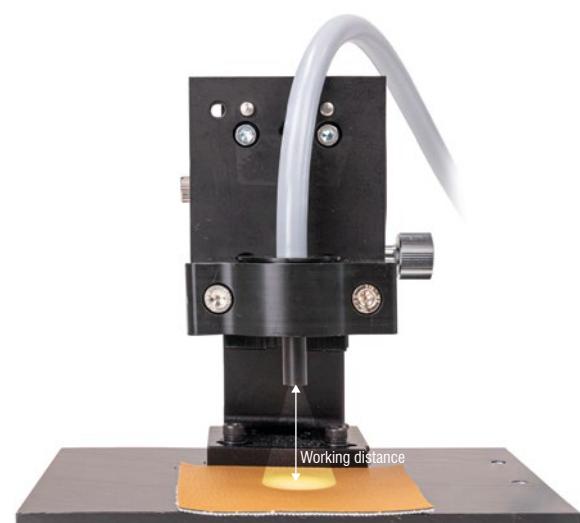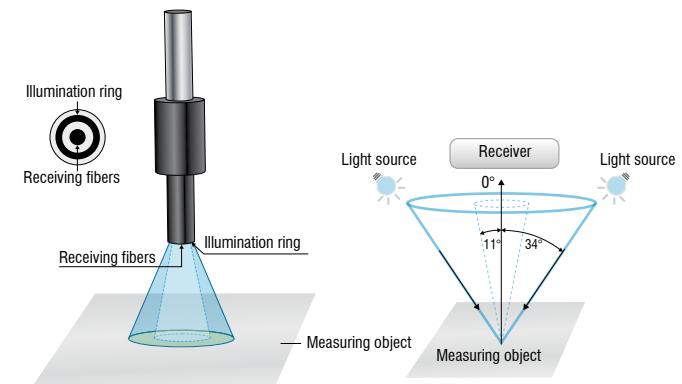

The circular sensor allows an evenly illuminated larger measurement spot.

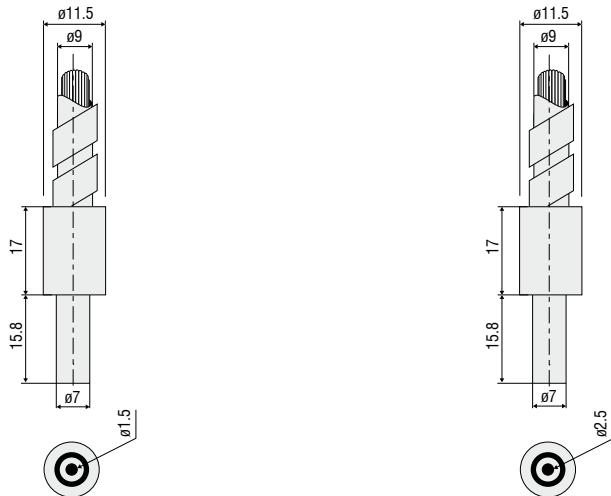

Model	CFS2-M11	CFS2-M20
Part number	10814900	10814895
Type of sensor	Circular sensor	
Working distance ¹⁾	Start	10 mm
	Optimal	30 mm
	End	60 mm
Measurement spot diameter ¹⁾	Start	13 mm
	Optimal	35 mm
	End	70 mm
Light spot diameter ¹⁾	Start	18 mm
	Optimal	48 mm
	End	85 mm
Repeatability in rotation ¹⁾²⁾³⁾	$\Delta E \leq 0.5$	
Measurement geometry	R34°c:0°	R11°c:0°
Min. target size (flat)	Ø 13 mm	Ø 11 mm
Minimum curvature radius of target (curved)	130 mm	110 mm
Sensitivity	Distance ¹⁾³⁾	< 3 ΔE / mm
	Tilt angle ¹⁾³⁾	< 0.3 ΔE / °
Permissible ambient light ¹⁾³⁾	Ambient light ¹⁾³⁾	< 0.3 ΔE / 1,000 lx
		< 9,500 lx
Max. tilt angle ¹⁾³⁾	$\pm 45^\circ$	
Connection	integrated fiber-optic cable (axial) with metal-silicone (T) sheath, standard length 1.2 m; other lengths 0.3 ... 2.4 m optionally available	
Mounting	FA (M18x1)	
Temperature range	Storage / operation	Sensor head: -10 °C ... +80 °C; cable: -60 °C ... +180 °C
Humidity	20 ... 80 % r.H. (non-condensing)	
Protection class (DIN EN 60529)	IP64	
Material	Aluminum black anodized, glass, glass fiber bundle with metal-silicone coating (T)	
Weight	170 g	200 g
Compatibility	CFO controller (LT, WLCS, FES)	
Features	All variants are also available with different cable sheath, length 0.3 ... 2.4 m, vibration protection, IP protection, suitable for drag chains and for temperature ranges up to 2,000 °C. In combination with a pressure-tight feed-through, a stainless steel sheath and T250° bonding, vacuum applications down to 10-5 mbar are also possible.	

The specified data apply to a white, diffuse reflecting surface (zenith white reference)

¹⁾ In combination with colorSENSOR CFO200 and a repeatability of $\Delta E \leq 0.3$

²⁾ On titanium pearl mica from a distance of 30 mm

³⁾ Valid for optimal working distance

Sensors and Systems from Micro-Epsilon



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement



Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers



3D measurement technology for dimensional testing and surface inspection

