





More Precision

optoNCDT // Laser displacement sensors (triangulation)

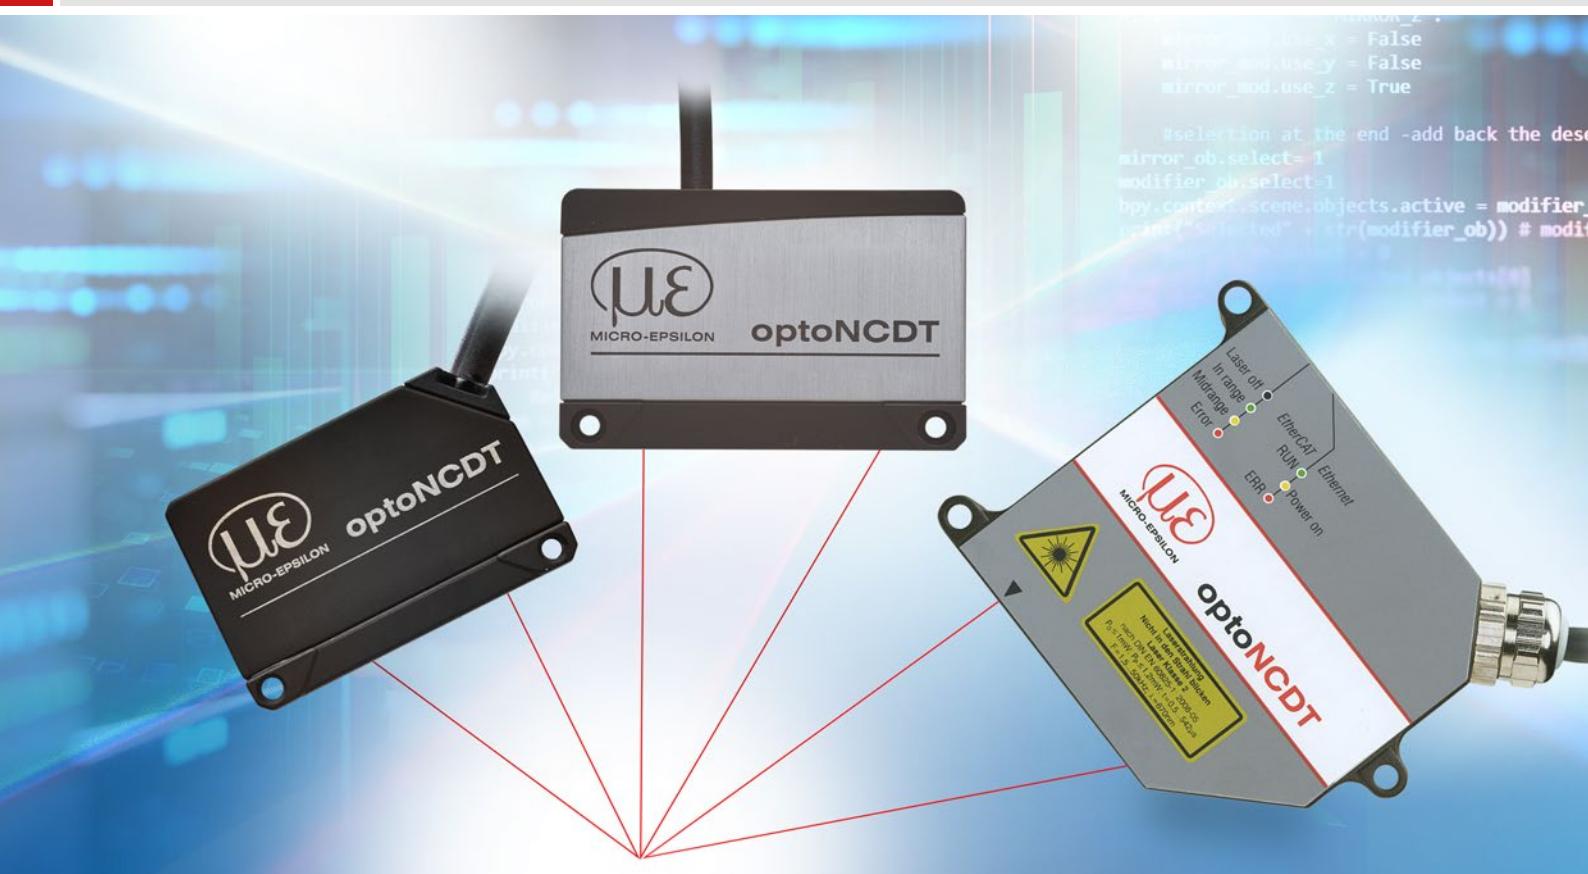

Powerful laser sensors for special applications optoNCDT 17x0 / optoNCDT 1910

-  Adjustable measuring rate up to 10 kHz
-  Analog (U/I) / RS422 / PROFINET / EtherNet/IP
-  Fast surface compensation
-  High repeatability
-  Ideal for large measurement distances

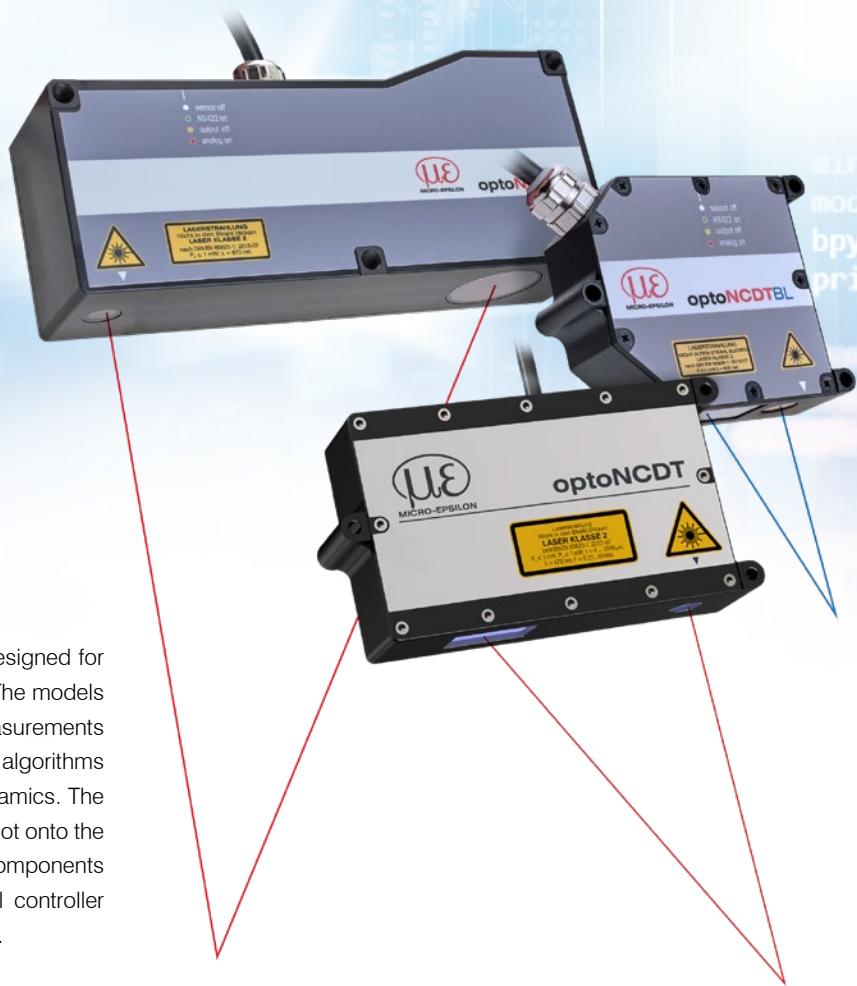

The optoNCDT 1910 and 1750 series laser sensors are designed for fast and precise measurements in industrial applications. The models are used for demanding surfaces and impress in measurements where large distances are required. Innovative evaluation algorithms and improved components enable high accuracy and dynamics. The high-performance optical system generates a small light spot onto the target which enables the detection of even the smallest of components reliably. The pigtail cable in conjunction with the internal controller reduces the installation effort for the sensors to a minimum.

The intelligent exposure control for demanding surfaces

The optoNCDT 1750 sensors feature real-time surface compensation. The real-time surface compensation feature (RTSC) determines the amount of reflection from the target surface during continuous exposure and in real-time. The exposure time or the amount of light produced by the laser is optimally matched to the reflection characteristics of the target surface. This enables extremely reliable measurements even on reflecting surfaces. The optoNCDT 1910 sensors use Advanced Surface Compensation and are also highly resistant to ambient light.


Ideal for industrial applications

Different output signals enable the integration of the sensor into plant and machine control systems. As well as analog voltage and current outputs, a digital interface provides distance information from the sensor. Due to the universal setting and evaluation possibilities, the sensors meet all the requirements for use in industrial applications.

Model	Technology	Measuring range	Repeatability	Linearity
optoNCDT 1750BL		2 - 750 mm	0.8 µm	from 0.06 %
optoNCDT 1750-DR		2 - 20 mm	0.1 µm	0.08 %
optoNCDT 1760		1000 mm	from 7.5 µm	0.10 %
optoNCDT 1910		500 / 750 mm	from 20 µm	0.07 %

Large distance and large measuring range


The optoNCDT long-range models are used to cover a large measuring range or to measure from a large distance to the target. The long-range laser sensors combine high accuracy and large measuring distances.

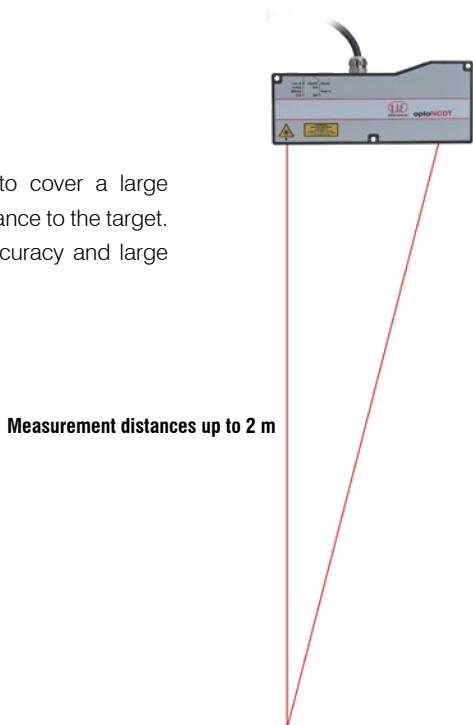


Application examples



Geometry testing of reflective glass parts

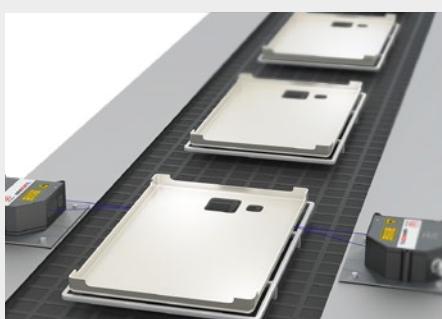

Position check of plastic components

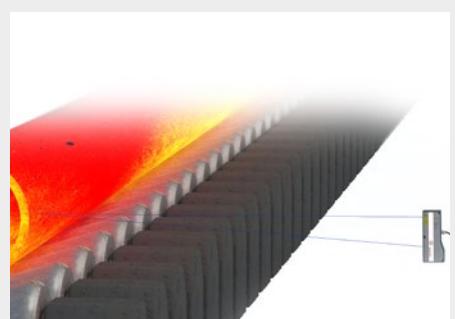

Position measurement of red-hot glowing pipes



Blue laser - optoNCDT 1750BL

Model	ILD1750-20BL	ILD1750-200BL	ILD1750-500BL	ILD1750-750BL	
Measuring range	20 mm	200 mm	500 mm	750 mm	
Start of measuring range	40 mm	100 mm	200 mm	200 mm	
Mid of measuring range	50 mm	200 mm	450 mm	575 mm	
End of measuring range	60 mm	300 mm	700 mm	950 mm	
Linearity ^[1]	< ±12 µm	< ±160 µm	< ±350 µm	< ±670 µm	
Linearity ^[1]	< ±0.06 % FSO	< ±0.08 % FSO	< ±0.07 % FSO	< ±0.09 % FSO	
Repeatability ^[2]	0.8 µm	15 µm	20 µm	45 µm	
Light spot diameter ^[3]	SMR	320 µm	1300 µm	1500 µm	
	MMR	45 µm			
	EMR	320 µm			
Light source	Semiconductor laser <1 mW, 405 nm (blue violet)				
Material	Die-cast zinc housing		Aluminum housing		

^[1]FSO = Full Scale Output; the specified data apply to white, diffuse reflecting surfaces (Micro-Epsilon reference ceramic for ILD sensors)

^[2]Measuring rate 5 kHz, median 9

^[3]±10 %; SMR = Start of measuring range; MMR = Mid of measuring range; EMR = End of measuring range



Direct reflection - optoNCDT 1750DR

Model	ILD1750-2DR	ILD1750-10DR	ILD1750-20DR
Measuring range	2 mm	10 mm	20 mm
Start of measuring range	24 mm	30.5 mm	53.5 mm
Mid of measuring range	25 mm	35.5 mm	63.5 mm
End of measuring range	26 mm	40.5 mm	73.5 mm
Linearity ^[1]	< ±1.6 µm	< ±6 µm	< ±12 µm
Linearity ^[1]	< ±0.08 % FSO		
Repeatability ^[2]	0.1 µm	0.4 µm	0.8 µm
Measuring angle	20°	17.6°	11.5°
Light spot diameter ^[3]	SMR	80 µm	110 µm
	MMR	35 µm	50 µm
	EMR	80 µm	110 µm


^[1]FSO = Full Scale Output; the specified data apply to white, diffuse reflecting surfaces (Micro-Epsilon reference ceramic for ILD sensors)

^[2]Measuring rate 5 kHz, median 9


^[3]±10 %; SMR = Start of measuring range; MMR = Mid of measuring range; EMR = End of measuring range

Dimensions optoNCDT 17x0


optoNCDT 1750DR

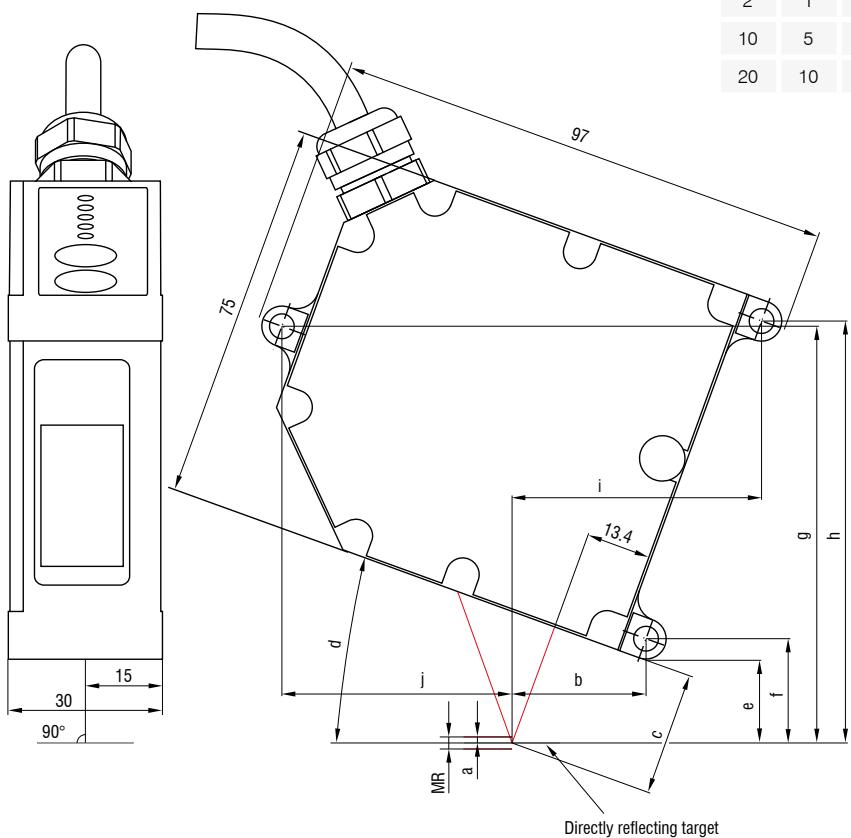


Connector (sensor side)

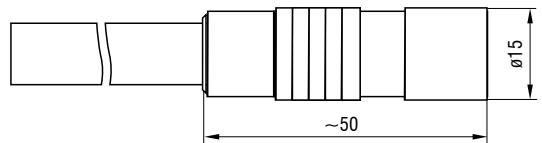


optoNCDT 1750BL / Measuring ranges 20 / 200

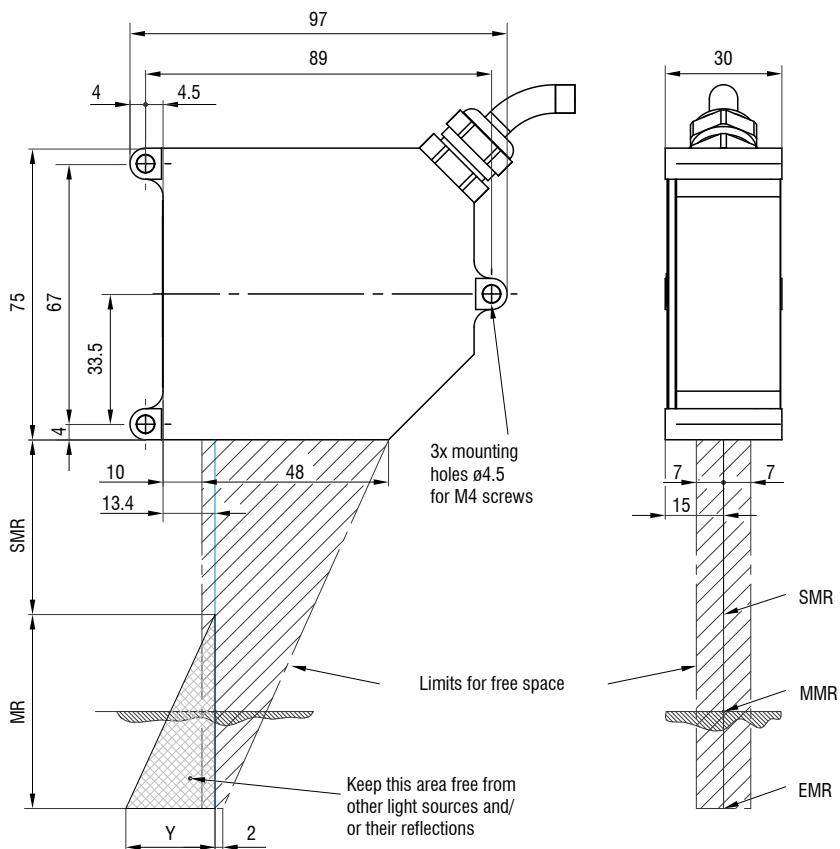

Connector (sensor side)

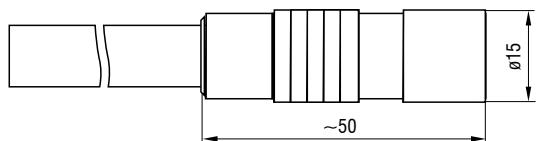


optoNCDT 1750BL / Measuring ranges 500 / 750

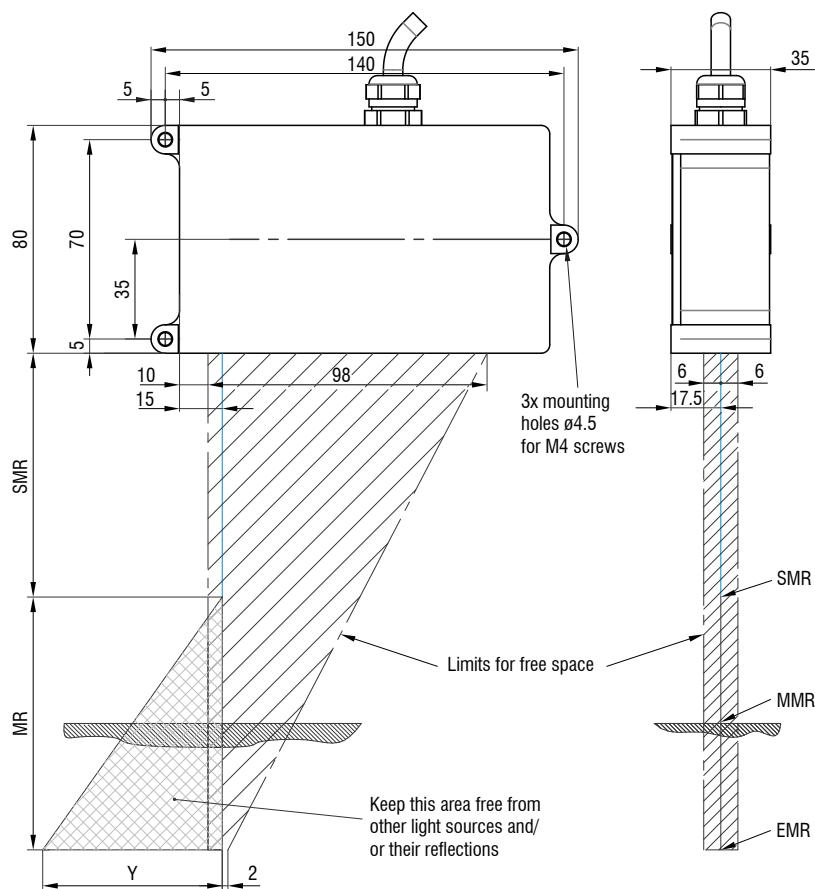

MR	SMR	Y
500	200	180
750	200	270

Connector (sensor side)

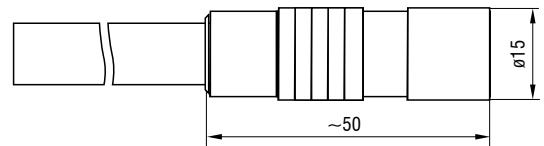

(Dimensions in mm, not to scale)

MR = measuring range; SMR = start of measuring range,
MMR = Mid of measuring range, EMR = end of measuring range

Connection possibilities optoNCDT 17x0 / 1910

optoNCDT 1750 / 1760

Drag-chain suitable extension and adapter cables

Cable diameter: 6.8 \pm 0.2 mm
 Drag chain: yes
 Robot: no
 Temperature range: -40 ... 90 °C (moving /not moving)
 Bending radius: > 55 mm (fixed installation / dynamic / drag chain)

Sensor	Cables	Type	Connection possibilities and accessories
ILD1750-xxBL ILD1750-xxDR ILD1760-1000	Extension cable pigtail Length 3 m / 6 m / 9 m / 15 m Art. no. Designation 2901189 PC1700-3 2901357 PC1700-6 2901191 PC1700-10 2901266 PC1700-15	Open ends	Supply voltage connection Power supply unit PS2020
	Adapter cable for PC interface card Length 3 m / 6 m Art. no. Designation 2901555 PC1700-3/IF2008 2901556 PC1700-6/IF2008 2901557 PC1700-8/IF2008		Interface module of RS422 to USB IF2001/USB IC2001/USB
	Adapter cable for sensor calculation Length 3 m / 6 m / 9 m Art. no. Designation 29011173 PC1750-3/C-Box 29011180 PC1750-6/C-Box 29011181 PC1750-9/C-Box		Interface module for Industrial Ethernet connection IF2035-PROFINET IF2035-EIP IF2035-EtherCAT
	Interface card for synchronous data acquisition IF2008PCIe / IF2008E	Sub-D	Interface card for synchronous data acquisition IF2008PCIe / IF2008E
	4-fold USB converter IF2004/USB		4-fold USB converter IF2004/USB
	Controller for D/A conversion and evaluation of up to 2 sensor signals Dual Processing Unit		Controller for D/A conversion and evaluation of up to 2 sensor signals Dual Processing Unit

Robot-suitable extension cables

Cable diameter: max. 9 mm
 Drag chain: no
 Robot: yes
 Temperature range: -40 ... 70 °C (moving / not moving)
 Bending radius: 110 mm (dynamic)

Sensor	Cables	Type	Connection possibilities and accessories
ILD1750-xxBL ILD1750-xxDR ILD1760-1000	Extension cable pigtail: Length 3 m / 6 m / 9 m / 15 m Art. no. Designation 2901494 PCR1700-5 2901299 PCR1700-10	Open ends	Connection supply voltage PS2020
	Interface module from RS422 to USB IF2001/USB IC2001/USB		Interface module from RS422 to USB IF2001/USB IC2001/USB
	Interface module for Industrial Ethernet connection IF2035-PROFINET IF2035-EIP IF2035-EtherCAT		Interface module for Industrial Ethernet connection IF2035-PROFINET IF2035-EIP IF2035-EtherCAT

Extension cables for high temperatures

Cable diameter:	max. 7.5 mm
Drag chain:	no
Robot:	no
Temperature range:	-55 ... 250 °C (moving) -90 ... 250 °C (not moving)
Bending radius:	> 40 mm (fixed installation) > 75 mm (dynamic)

Sensor	Cables	Type	Connection possibilities and accessories
ILD1750-xxBL	Extension cables high temperatures Length 3 m / 6 m / 9 m / 15 m Art. no. 29011091 Designation PC1700-3/OE/HT 29011092 PC1700-6/OE/HT 29011094 PC1700-15/OE/HT	Open ends	<p>Supply voltage connection Power supply unit PS2020</p> <p>Interface module of RS422 to USB IF2001/USB</p> <p>Interface module for Industrial Ethernet connection IF2035-PROFINET IF2035-EIP IF2035-EtherCAT</p>
ILD1750-xxDR			
ILD1760-1000			

Other cables

Cable diameter:	6.7 mm
Drag chain:	yes
Robot:	no
Temperature range:	-40 ... 80 °C
Bending radius:	> 27 mm (fixed installation) > 51 mm (dynamic)

Input	Cables	Type	Connection possibilities and accessories
2 x Sub-D (PC1700-x/IF2008)	Adapter cables for 4-fold sensor connection Length 0.1 m Art. no. 2901528 Designation IF2008-Y-adapter cable 	Sub-D	<p>Interface card for synchronous data acquisition IF2008PCIe / IF2008E</p> <p>4-fold USB converter & parameter setting IF2004/USB</p>

optoNCDT 1910

see Connection possibilities optoNCDT 1900 on pg. 32.

Protective housings for demanding environments

optoNCDT


SGH & SGHF models				SGHF-HT model
Protective housing Size S		Protective housing Size M		
SGH	SGHF	SGH	SGHF	 (260 x 180 x 154 mm)
 (140 x 140 x 71 mm)		 (180 x 140 x 71 mm)		Water-cooled protective housing with window and compressed-air connection for measurement tasks in ambient temperatures up to 200 °C.
Water-resistant housing protects the sensor from solvents and detergents.	Ideal with high ambient temperatures. The integrated air cooling of the housing offers optimum protection for the sensor.	Water-resistant housing protects the sensor from solvents and detergents.	Ideal with high ambient temperatures. The integrated air cooling of the housing offers optimum protection for the sensor.	Maximum temperature of cooling water T(max) = 10 °C Minimum water flow rate Q(min) = 3 liters/min
Size S suitable for		Size M suitable for		Suitable for
ILD1750-20BL		ILD1750-500BL		ILD1750-500BL
ILD1750-200BL		ILD1750-750BL		ILD1750-750BL
ILD2300-2 / -2LL / -2BL		ILD2300-200		ILD2300-200
ILD2300-5 / -5BL		ILD2300-300		ILD2300-300
ILD2300-10 / -10LL / -10BL		ILD2310-10		ILD2310-10
ILD2300-20 / -20LL		ILD2310-20		ILD2310-20
ILD2300-50 / -50LL		ILD2310-40		ILD2310-40
ILD2300-100				ILD2310-50BL

Protective housing SGHF ILD1900

Compact protective housing which is simply attached to the sensor. The protective housing has an air purge for cleaning the protective windows. It also cools the sensor.
Suitable for
ILD1900-6 / -6LL
ILD1900-10 / -10LL
ILD1900-25 / -25LL
ILD1900-50 / -50LL
ILD1900-100
ILD1900-200
ILD1900-500

sensorTOOL

The Micro-Epsilon sensorTOOL is a powerful software that is used to operate one or more optoNCDT sensors. The sensorTOOL can be used to access the sensor connected to the PC, display its complete data stream and save it in a file (in Excel-compatible CSV format). The sensor is configured via its web interface.

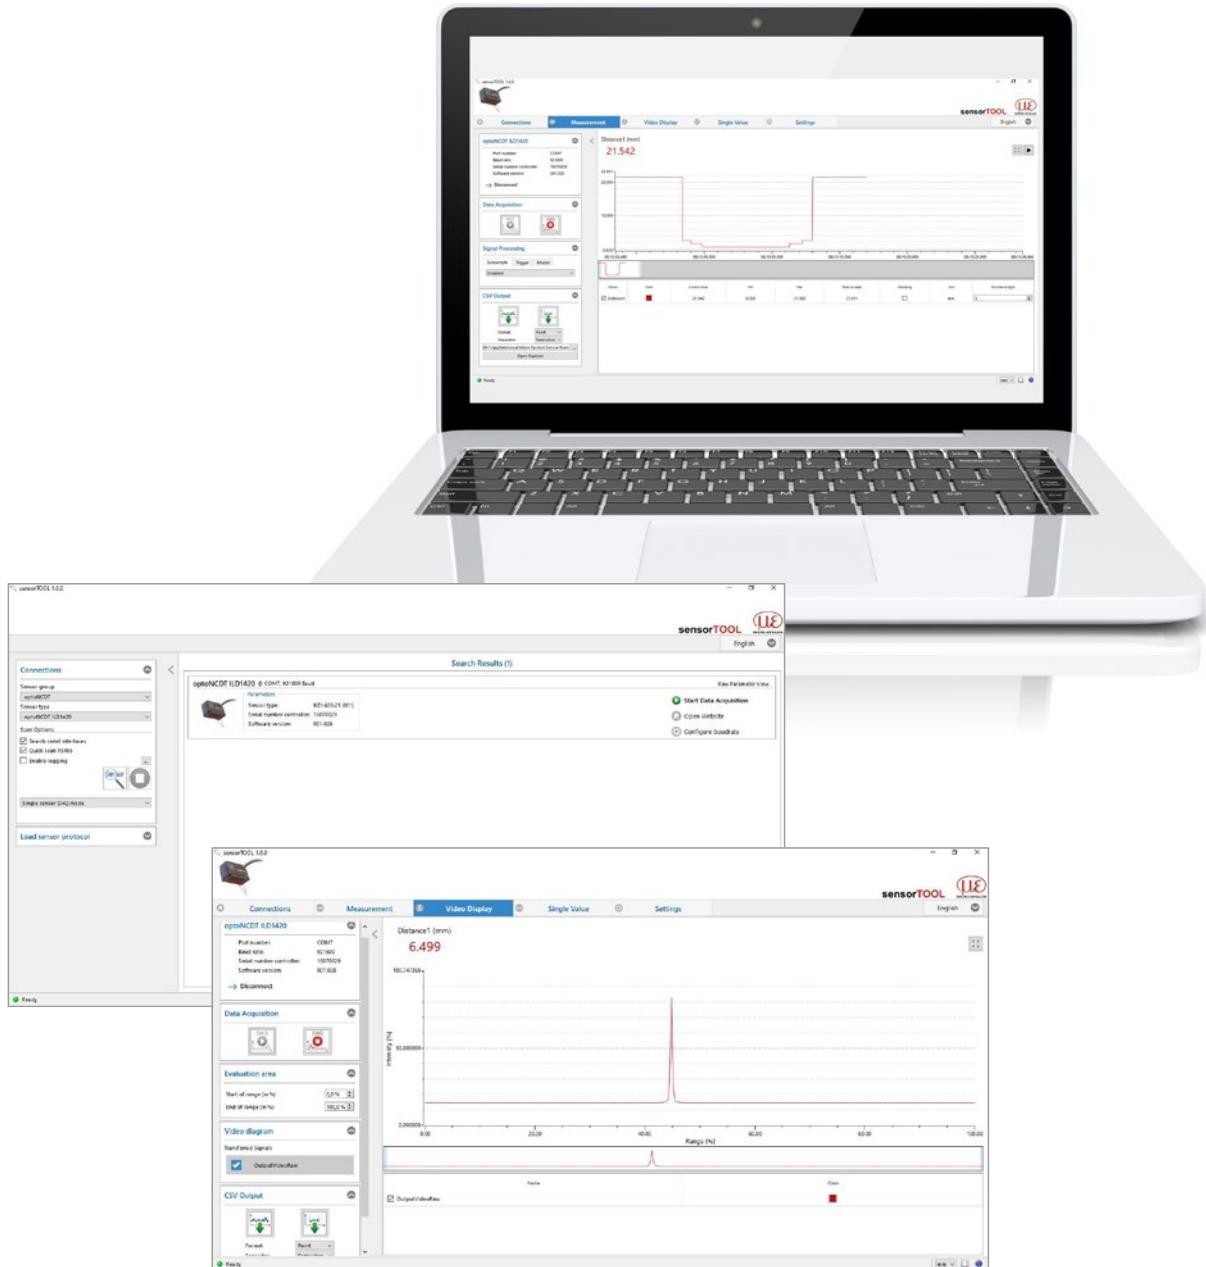

Free download

All software tools, drivers and documented driver DLL for easy integration of the sensors into existing or internally-generated software are available free of charge under www.micro-epsilon.de/download


Sensors and Systems from Micro-Epsilon



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement

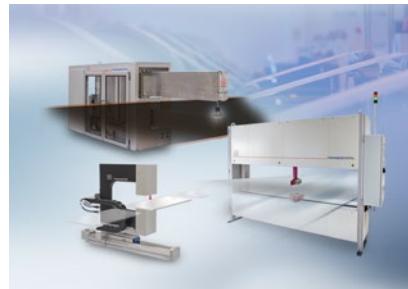

Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers



3D measurement technology for dimensional testing and surface inspection